

Gigabit Ethernet Switch (GES) AB12EXT

Part Number: AE102698-003

12-Port Ultra-Rugged Ethernet Switch



FEATURES

Ethernet Ports	<ul style="list-style-type: none">12x managed tri-speed 10/100/1000 BASE-T
Networking	<ul style="list-style-type: none">16K MAC Switching EngineAuto MDI/MDX and polarity correctionAuto/Manual Port Speed/Duplex Selection802.1q VLANs, RSTP, IGMP SnoopingPort Mirroring
Control and Status	<ul style="list-style-type: none">Serial Port Command Line InterfaceIn Band SSH, SNMP v2/3 MIBsDefault and custom non-volatile configurations
Power	<ul style="list-style-type: none">DO-160G Power/VoltageVoltage Input: 12Vdc - 33Vdc (28Vdc nominal)Power Consumption: 14 W maximum
Connectors / Indicators	<ul style="list-style-type: none">Power and LAN Connector: MIL-C-38999LED Indicator: PowerPin compatible with GES Gen2
Mechanical	<ul style="list-style-type: none">Housing: Machined rugged aluminumAdditional internal bonding over AB12Weight: 2.76 lbsDimensions: 5.15" W x 8.25" L x 1.38" HInstallation: 4x thru holes
Standards Compliance and Compatibility	<ul style="list-style-type: none">IEEE 802.1, IEEE 802.3, DO-160, MIL-STD-704, MIL-STD-810, MIL-HDBK-5400, MIL-HDBK-217
Cooling	<ul style="list-style-type: none">No forced air or conductive cooling needed.
Environmental	<ul style="list-style-type: none">MIL-STD-810F w/ 20,000 cycles @ 150g
EMI / EMC	<ul style="list-style-type: none">DO-160G RF Emission and Susceptibility
Temperature Range	<ul style="list-style-type: none">Operating: -40C to +71CStorage: -57C to +95C
Altitude	<ul style="list-style-type: none">Operating up to: 65,000 ft continuous
MTBF	<ul style="list-style-type: none">>27,000 hours @ 55C, Airborne Uninhabited Fighter Environment (calculated)
Customizable	<ul style="list-style-type: none">Aeronix offers an extensive line of Engineering Services including the creation and implementation of custom configurations for AB12EXT Packaging, Connectors, Number of Channels, and/or other customer unique requirements.



The Aeronix Gigabit Ethernet Switch (GES) AB12EXT provides twelve Tri-speed Ethernet ports for use in commercial, industrial, and military applications that require ultra-high data transfer rates in a self contained ultra-ruggedized package. The rugged design requires no forced air or conductive cooling, allowing operation in a broad range of harsh environments including operation in uninhabited aircraft bays, or even mining operations close to the drill head.

The fundamental difference between the AB12EXT and the AB12 is the AB12EXT is designed to survive in extreme shock and vibration environments up to 20,000 cycles at 150g. This allows the AB12EXT to survive in extreme shock applications.

Each of the twelve IEEE 802.3ab ports can individually auto-detect data rates of 10, 100, or 1000 Base-T, or can be managed externally.

The AB12EXT is a fully managed Layer 2 switch with the capability of customer specific configurations. The management functions are stored in non-volatile memory for fixed configurations, or loaded at startup for application specific requirements.

Incorporating the Aeronix AB12EXT into your design allows the use of high speed Ethernet connectivity between any or all of your devices while virtually eliminating data-rate bottlenecks, all while operating at extreme shock and vibration environments.



ethernet@aeronix.com

www.aeronix.com

1775 West Hibiscus Boulevard ■ Suite 200 ■ Melbourne Florida 32901 ■ Tel.(321) 984-1671 ■ Fax.(321) 984-0366

The information in this document is subject to change without notice. Contact Aeronix for latest details.

Gigabit Ethernet Switch (GES) AB12EXT

Part Number: AE102698-003

12-Port Ultra-Rugged Ethernet Switch

Aeronix Airborne 12 Port Switch Extreme (AB12EXT) Qualifications

Characteristic	Detail		
Ports	12x 10/100/1000Mbps IEEE 802.3ab compatible		
Dimensions	5.1"W x 8.25"L x 1.38"H		
Weight	2 lb 12.1 oz (1.25 kg)		
Processor	NXP QorIQ P1010		
Connectors	MIL-C-38999 (Signal and Power)		
Test	Detail	Specification	Comment/Tailoring
Environmental			
Low Pressure (Altitude)	Storage	MIL-STD-810F Method 500.4 Procedure I	Procedure I: -57°C @ 65,000 feet
	Operational	MIL-STD-810F Method 500.4 Procedure II	Procedure II: -40°C @ 65,000 feet
	Explosive Decomp	MIL-STD-810F Method 500.4 Procedure IV	Procedure IV: 8,000 feet to 23,100 feet in 8mSec
High Temperature	Storage	MIL-STD-810F Method 501.4 Procedure I	Procedure I: +95°C
	Operational	MIL-STD-810F Method 501.4 Procedure II	Procedure II: +71°C
Low Temperature	Storage	MIL-STD-810F Method 502.4 Procedure I	Procedure I: -57°C
	Operational	MIL-STD-810F Method 502.4 Procedure II	Procedure II: -40°C
Rain	Drip	MIL-STD-810F Method 506.4 Procedure III	
Humidity		MIL-STD-810F Method 507.4	Operating and non-operating effects of humidity, condensing
Fungus		MIL-STD-810F Method 508.5	Designed with certified fungus inert materials
Salt Fog	Exposure	MIL-STD-810F Method 509.4 Procedure I	Operating and non-operating exposure to salt-sea atmosphere
Sand and Dust	Blowing	MIL-STD-810F Method 510.4 Procedure I & II	
Explosive Atmosphere		MIL-STD-810F Method 511.4 Procedure I	At site and 40,000ft altitudes
Acceleration Load Factors	Ultimate Loads	MIL-STD-810F Method 513.5 Procedure I	Limit Load test at Ultimate Load level, ±15.0G applied individually along the three axes
	Crash Landing		Remain captive, 40G forward, 20G aft and down, 14G left/right, 10G up
Vibration	Performance	MIL-STD-810F Method 514.5	0.025 G2/Hz 15 - 2000 Hz, Overall 4.4Grms
	Endurance	MIL-STD-810F Method 514.5	0.060 G2/Hz 15 - 2000 Hz, Overall 9.2Grms
Acoustical Noise		MIL-STD-810B Method 515.1 Category B	140db
Shock	Functional	MIL-STD-810F Method 516.5 Procedure I	Eighteen (18) blows, terminal peak sawtooth, 20g, 11ms
	Crash Safety	MIL-STD-810F Method 516.5, Procedure V	TPS, 40g, 11 mSec shock as modified by MIL-STD-810B, Method 516, Procedure III Figure 516-1
	Mining		20,000 cycles at 150g
MTBF		MIL-HDBK-217 FN2	27,000 hours @ +55°C, Airborne Uninhabited Fighter Environment, 100% Duty Cycle
Service Life			>30,000 hours
Mounting Hardware			Thru-Holes provided
Cooling Air	Free Air, unmounted	MIL-HDBK-5400	Does not use the aircraft structure as a heat sink
Electromagnetic Compatibility			
AF Conducted Susceptibility		DO-160G - Section 18	Category B
Induced Signal Susceptibility		DO-160G - Section 19	Category AC
Radio Frequency RS and CS	Conducted	DO-160G - Section 20	Category T
	Radiated		Category T
	Bonding		< 2.5mΩ
Emission of Radio Frequency Energy	Conducted	DO-160G - Section 21	Category M
	Radiated		Category M
ESD		DO-160G - Section 25	Category A
Primary Power			
Power Input	+28VDC in	DO-160G - Section 16	Category B
Voltage Spike		DO-160G - Section 17	Category B
Power Consumption			14 Watts maximum



ethernet@aeronix.com

www.aeronix.com


1775 West Hibiscus Boulevard ■ Suite 200 ■ Melbourne Florida 32901 ■ Tel.(321) 984-1671 ■ Fax.(321) 984-0366

The information in this document is subject to change without notice. Contact Aeronix for latest details.

Gigabit Ethernet Switch (GES) AB12EXT

Part Number: AE102698-003

12-Port Ultra-Rugged Ethernet Switch

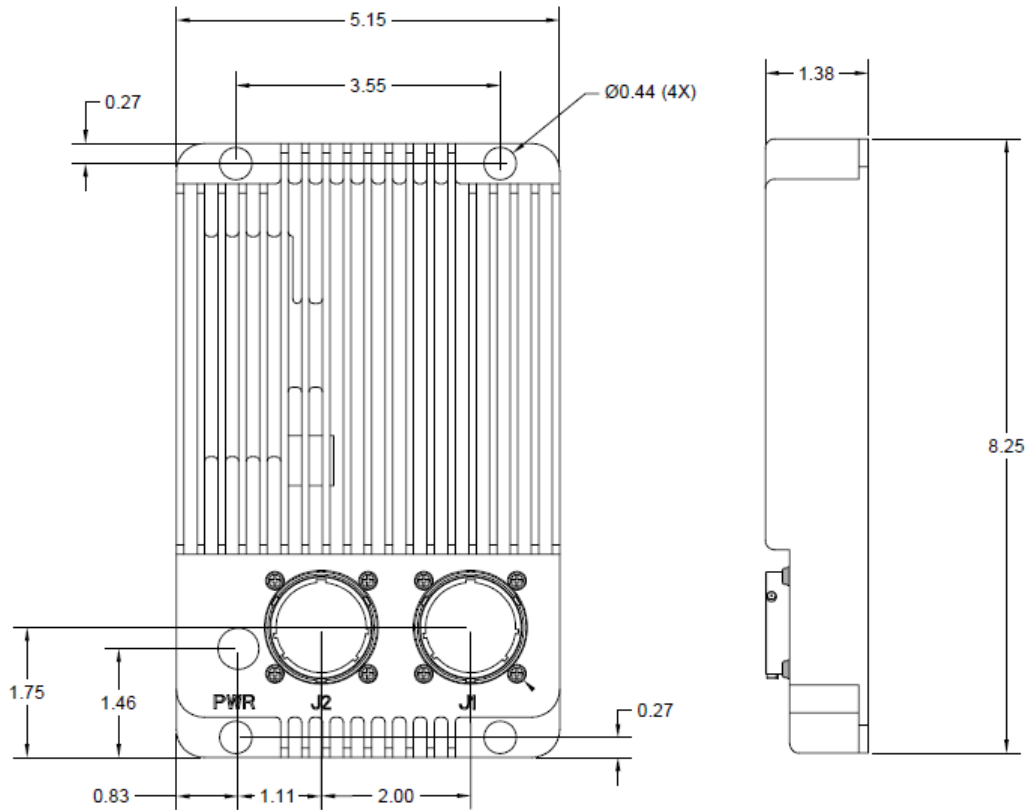

3D model file available upon request

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
AE102698-003	<ul style="list-style-type: none">Military Ultra-Rugged, Ethernet Switch, DO-160 Qualified, 12 x 10/100/1000 BASE-T with MIL-C-38999 Connectors
Accessories (Intended for Lab Use Only)	
AE102576-001	<ul style="list-style-type: none">Breakout box from AB12EXT to 12x RJ45 in box, 1x DB-9 cable and connector, and Banana plug power cables
AE102085-002	<ul style="list-style-type: none">Breakout cabling from AB12EXT P1 to 6x RJ45 connectors and 2x DB-9 connector, cable length 12 inches
AE102086-001	<ul style="list-style-type: none">Breakout cabling from AB12EXT P2 to 6x RJ45 connectors and 2x Banana jack, cable length 12 inches
AE102085-084	<ul style="list-style-type: none">Breakout cabling from AB12EXT P1 to 6x RJ45 connectors and 2x DB-9 connector, cable length 84 inches
AE102086-084	<ul style="list-style-type: none">Breakout cabling from AB12EXT P2 to 6x RJ45 connectors and 2x Banana jack, cable length 84 inches



ethernet@aeronix.com

www.aeronix.com

1775 West Hibiscus Boulevard ■ Suite 200 ■ Melbourne Florida 32901 ■ Tel.(321) 984-1671 ■ Fax.(321) 984-0366

The information in this document is subject to change without notice. Contact Aeronix for latest details.