

Gigabit Ethernet Switch (GES) NXT-8

The Aeronix Gigabit Ethernet Switch (GES) NXT-8 is a MIL-Qualified 8-port Ethernet switch equipped with 8 x 10/100/1000 BASE-T copper ports. It is used in commercial, industrial, and military applications that require ultra-high data transfer rates in a self-contained ruggedized package. The rugged design requires no forced air or conductive cooling, operating in a broad range of harsh environments including uninhabited aircraft bays.

The NXT-8 is a fully managed Layer 2/3 router with the capability of customer specific configurations. The configurations are stored in non-volatile memory and loaded at startup to fulfill application specific requirements. All configurations are authenticated.

KEY FEATURES

Part Number: AE103716-001

Enhanced Features

- Time-Sensitive Networking (Deterministic Ethernet)
 - Low latency, Highest QoS, Assured bandwidth
 - GDA 2.0 ready
- PTPv2 (IEEE-1588 and 802.1as)
 - Grandmaster (GM) capable via external GPS
 - Phase lock to GM in less than 20 secs
 - Jitter from GM less than 100 ns
- Secure Boot, Secure Update, Secure Config
 - HWASIC-enforced using asymmetric ECDSA P384
 - Rescue via TOTP
- Enhanced Built-In Test (Startup, Periodic, Initiated)
 - Time-Domain Reflectometry cable test
 - MAC Bouncing (spoofing) detection
- Store and Forward (default), Cut-through
- Port and Flow Mirroring, Jumbo frames
- Monitoring alarms through SNMP or JSON-RPC
- Hardware & Software Zeroize
- Boot Time < 50s
- Tri-Color Power/status LED

Networking

- Auto MDIX with automatic downshifting
- Loop Guard and ERPS (802.1Q)
- Spanning Tree (802.1d), RSTP (802.1w), MSTP (802.1s)
- IGMP v2/v3 and MLD v1/v2 Snooping, GARP (802.1ak)
- Broadcasting and Storm Control
- VLANs (802.1Q), Trunking, and Native VLAN
- VLAN Q-in-Q double-tagging (bridging) PVLANS
- QoS Multi-Layer Classifier, Strict Queues, Fair Queues, ACLs, ToS/DSCP
- L3 Static Routing, RIP v2, OSPF v2/v3
- Link Aggregation (802.3AD)
- IPv4 and IPv6 support

Standards Compliance & Compatibility

- IEEE 802.1, IEEE 802.3, DO-160, MIL-STD-704, MIL-STD-810, MIL-HDBK-5400, MIL-HDBK-217

Security and Access Control

- Hardware-enforced Secure Boot
- Hardware Root of Trust (HrOT)
- Authentication on all mgmt interfaces
- Encryption on SSH, JSON-RPC and Web
- AAA, 802.1X, RADIUS, TACACS+, Firewall, ACLs
- Port MAC Security, Sticky MACs
- ARP Inspection, IP Source Guard, DHCP Snooping
- BPDU Guard, Root Guard
- Syslog & audit trail to both UDP and TCP servers
- Traffic data not stored in non-volatile memory
- Backup Image and recovery


Management Interfaces

- In-band HMI: SSH v2 CLI, Telnet CLI, HTTP/S Web
- In-band MMI: SNMP v1/v2/v3, HTTP/S JSON-RPC, GEN2 (AE101264-00X) backwards compatible API
- Out-of-band HMI: RS232 CLI

All interfaces can be individually disabled via startup-config

Ethernet Ports

- 8 x 10/100/1000Mbps BASE-T Copper Ports

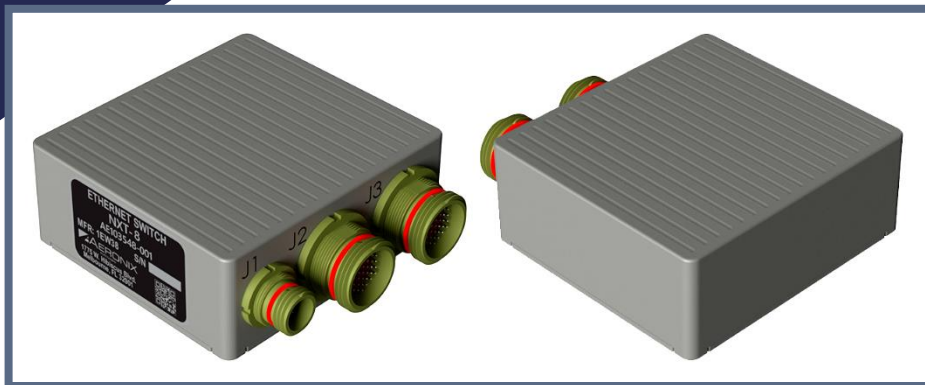

Engineered Solutions. Delivered. Aeronix offers an extensive line of Engineering Service including the creation and implementation of custom solutions to meet even the toughest requirements.



An ATG Company



1775 West Hibiscus Blvd Suite 200
Melbourne Florida 32901


Tel. (321) 984-1671 Fax. (321) 984-0366

www.aeronix.com - mailto:ethernet@aeronix.com

Aeronix Airborne 8 Port Router (NXT-8) Qualifications

Characteristic	Detail		
Ports	8 x 10/100/1000Mbps BASE-T Copper Ports - IEEE 802.3ab Compatible		
Dimensions	3.25"W x 3"L x 1.25"H		
Weight	1.5 lbs (.68 kg)		
Processor	LAN9668		
Connectors	1 x 2M801-011-07NF-13-37PA/B and 1 x 2M801-011-07NF-8-135A		
Test	Detail	Specification	Comment/Tailoring
Environmental			
Low Pressure (Altitude)	Storage	MIL-STD-810G Method 500.4 Procedure I	Procedure I: -57°C @ 50,000 feet
	Operational	MIL-STD-810G Method 500.4 Procedure II	Procedure II: -40°C @ 40,000 feet
	Explosive Decomp	MIL-STD-810G Method 500.4 Procedure IV	Procedure IV: 8,000 feet to 40,000 feet in not more than 0.1Sec
High Temperature	Storage	MIL-STD-810G Method 501.5 Procedure I	Procedure I: +95°C
	Operational	MIL-STD-810G Method 501.5 Procedure II	Procedure II: Cyclic = +55°C Constant = +71°C for 30 Minutes
Low Temperature	Storage	MIL-STD-810G Method 502.5 Procedure I	Procedure I: -57°C
	Operational	MIL-STD-810G Method 502.5 Procedure II	Procedure II: Cyclic = -40°C Sea level Constant = -65°C for 120 Minutes
Temperature	Shock	MIL-STD-810G Method 503.5 Procedure I-B	Procedure I-B: from Constant = -54°C to +71°C at 125°C/Minute
Comb Temp Alt/Humidity	Operational	MIL-STD-810G Method 520.3 Procedure III	Procedure III: -40°C to +71°C Sea level to 60,000ft
Rain	Drip	MIL-STD-810G Method 506.5 Procedure III	7 gal/ft2/hr. 40 mph for 30 minutes
Humidity	Exposure	MIL-STD-810F Method 507.5 Procedure II	Operating and non-operating effects, 95% ± 4% Humidity +30°C to 60°C, 10 Cycles
Fungus	Non-Operational	MIL-STD-810G Method 508.6	7-day growth
Salt Fog	Exposure	MIL-STD-810G Method 509.5	Operating and non-operating exposure to salt-sea atmosphere – Four 24hr wet/dry cycles
Sand and Dust	Blowing	MIL-STD-810G Method 510.5 Procedure I & II	<150um dust, 150um to 850um sand
Explosive Atmosphere	Operational	MIL-STD-810G Method 511.5 Procedure I	At site and 40,000ft altitudes
Acceleration Load Factors (Structural)	Limit Loads	MIL-STD-810F Method 513.6 Procedure I	Performance at ±10.0g applied individually along all 3 axes
	Ultimate Loads	MIL-STD-810F Method 513.6 Procedure II	Withstand without structural failure ±15.0g applied individually along all 3 axes
	Crash Landing	MIL-STD-810F Method 513.6 Procedure III	Remain captive, 40G forward, 20G aft and down, 18G left/right, 10G up
Vibration	Performance	MIL-STD-810G Method 514.6 Procedure I	Cat 12, Annex D, 514.6D-I; 30 mins, 0.02 G2/Hz to 0.04 G2/Hz, 15-2000 Hz, Overall, 4.4Grms
	Endurance	MIL-STD-810G Method 514.6 Procedure I	Cat 12, Annex D, 514.6D-I; 60 mins, 0.04 G2/Hz to 0.06 G2/Hz, 15-2000 Hz, Overall, 9.2Grms
	Gunfire	MIL-STD-810G Method 519.6, Procedure III	7.5 min sweeps, 5 to 15 g, 66 to 856 Hz
	UH-60 Main	MIL-STD-810G Method 514.6, Procedure I	Cat 14, Annex A & D, Table 514.6D-III; 4 hours, 0.001g2/Hz to 0.01g2/Hz, 3 to 500 Hz
Acoustical Noise	Operational	MIL-STD-810G Method 515.6 Procedure I	30 mins, 140dB overall, 50 to 10000 Hz
Shock	Functional	MIL-STD-810G Method 516.6 Procedure I	20g, 11ms nominal, 3 blows ea direction, ea axis (18 total), terminal peak sawtooth (TPS)
	Crash Hazard	MIL-STD-810G Method 516.6, Procedure V	40g, 11ms nominal, 2 blows ea direction, ea axis (12 total) TPS
	Bench Handling	MIL-STD-810G Method 516.6, Procedure VI	4" drop, 1 drop per edge per face (24 total)
MTBF	100% Duty Cycle	MIL-HDBK-217 FN2	63.298 hrs @ +55°C, 44.943 hrs @ +70°C Airborne Uninhabited Fighter Environment
Mounting Hardware	Vibration Tolerance		4 x 10-32 captive screws
Cooling Air	Free Air, unmounted	MIL-HDBK-5400	Free convection and radiation. Does not use the aircraft structure as a heat sink
Electromagnetic Compatibility			
Conducted Emissions	Operational	MIL-STD-461G CE101 Par 5.4, CE101-4 Curve #2	Power Leads, 30 Hz to 10 kHz
		MIL-STD-461G CE102 Par 5.5, CE102-1 Basic Curve	Power Leads, 10 kHz to 10MHz
Conducted Susceptibility	Operational	MIL-STD-461G CS101 Par 5.7, CS101-1 Curve #2	Power leads, 30Hz to 150 kHz
		MIL-STD-461G CS114 Par 5.12, CS114-1 Curve #5	Bulk cable injection, 10 kHz to 200MHz
		MIL-STD-461G CS115 Par 5.13, CS115-1	Bulk cable injection, impulse excitation, 30Hz for one minute
		MIL-STD-461G CS116 Par 5.14, CS116-1 and CS116-2	Damped sinusoidal transients, cables, & power leads, 10kHz to 100MHz, 5 mins
Radiated Emissions	Operational	MIL-STD-461G RE101 Par 5.17, RE101-1 and RE101-2	Magnetic field, 30Hz to 100kHz
		MIL-STD-461G RE102 Par 5.18, RE102-3	Fixed wing external and Fixed wing internal < 25m; Electric field, 10kHz to 18GHz
Radiated Susceptibility	Operational	MIL-STD-461G RS101 Par 5.20 RS101-2	Army; Magnetic field, 30 Hz to 100 kHz
		MIL-STD-461G RS103 Par 5.21, Table XI	Aircraft Internal Army; Electric field, 2 MHz to 18 GHz
Primary Power			
Power Input	+28VDC in	MIL-STD-704F and MIL-STD-1275E	Category B
Voltage Spike		MIL-STD-704F and MIL-STD-1275E, 5.3.3.1.1	Category B; Spikes: +/- 250V, 50 ea, 2 Joules
Power Consumption	Operational	Startup ≤ 16W Steady State @ max speed with all ports on ≤ 8W	

Gigabit Ethernet Switch (GES) NXT-8

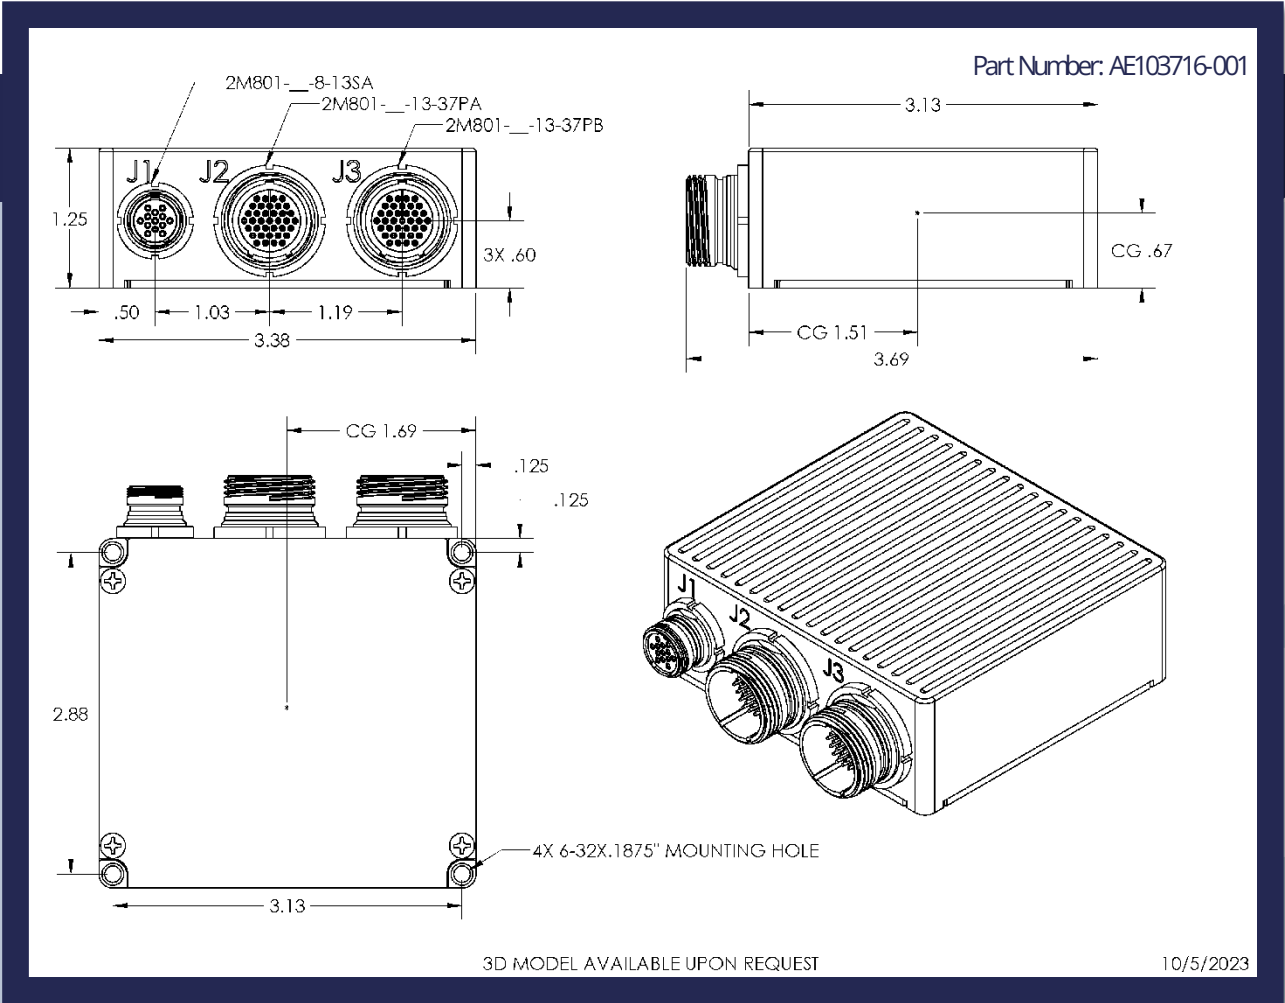

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
AE103716-001	Military Rugged, Ethernet Switch/Router, DO-160 Qualified, 8 x 10/100/1000 BASE-T and 4x Ports with MIL-C-38999 Connectors
Accessories (Intended for Lab Use Only)	
TBA	TBA